

# #14 Heavy Duty Roofing Fastener



## Product Description

SHDS ##14 Heavy Duty Roofing Fastener are designed to secure insulation to 16-22 gauge steel and wood decks. The fastener must achieve a penetration depth of 3/4" minimum. The fastener is also available pre-assembled with 3" Galvanized Steel Insulation Plates. Pre-assembled insulation fasteners and plates are fast to install and increase productivity in the mechanical attachment of roof insulation boards.


## Features & Benefits

- Heavier shank and thread diameters than most standard roofing fasteners.
- Buttress thread design provides high pullout resistance.
- Sharp drill point for quick installation.

## Corrosion Resistance

- 1800 hrs salt spray NSS resistance tested by SGS, appearance rating above 10 (ASTM B117-18)
- 15 cycle Kesternich test, no red rust (GB 9789)
- 1500hr salt spray NSS resistance test, no red rust (GB/T 10125)

Length	Thread	PKG(QTY)	Weight
1-1/4"-32mm	Full	1000	13lbs (5.9kg)
1-1/2"-38mm	Full	1000	16lbs (7.1kg)
2"-50mm	Full	1000	19lbs (8.8kg)
3"-75mm	Full	1000	27lbs (12.5kg)
4"-100mm	3" (75mm)	1000	37lbs (16.6kg)
5"-125mm	4" (102mm)	1000	45lbs (20.49kg)
6"-150mm	4" (102mm)	1000	54lbs (24.39kg)
7"-178mm	4" (102mm)	500	32lbs (14.3kg)
8"-200mm	4" (102mm)	500	36lbs (16.4kg)
9"-228mm	4" (102mm)	500	39lbs (17.6kg)
10"-254mm	4" (102mm)	500	41lbs (18.6kg)
11"-280mm	4" (102mm)	250	24lbs (10.7kg)
12"-304mm	4" (102mm)	250	26lbs (11.6kg)

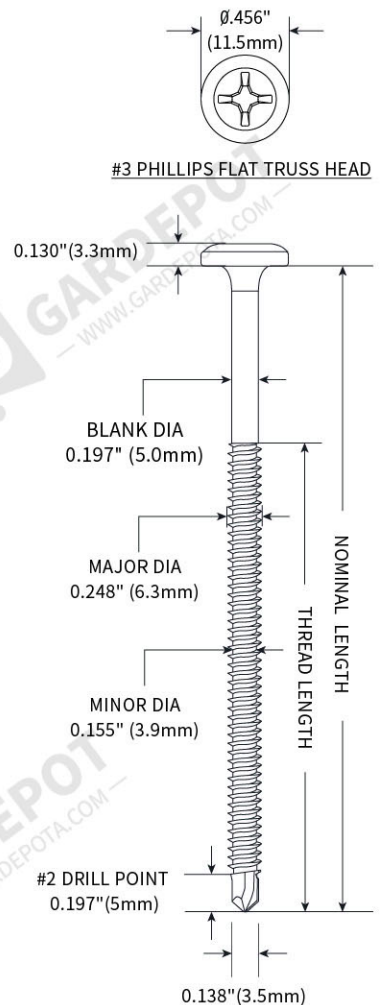

Roofing material  
supplier